

AIRPHO


Quick Installation Guide

300Mbps Wi-Fi Range Extender
AR-E210

Airpho Technology Co.,Ltd
Web: www.airpho.com

1 Power on the Extender

Connect the range extender to any 5V USB power supply device, to begin the initiation process. Blue LED will flash to indicate successful startup.

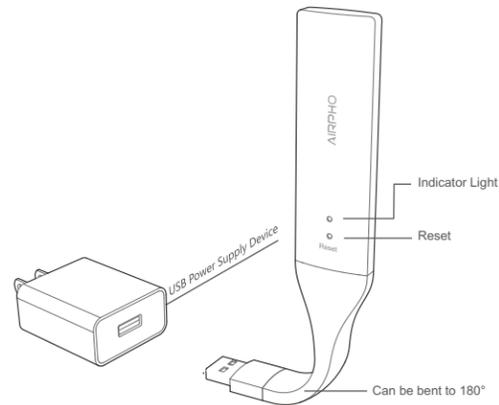

2 Connect to the Extender's network


For Computer Users

Disconnect your Ethernet(wired) connection from your computer. Click the Wi-Fi icon on the taskbar and connect to the extender's network.



For Mobile Device Users

Go to Wi-Fi setting of your mobile device, and connect to the Extender's network (e.g. AIRPHO_XXXX)

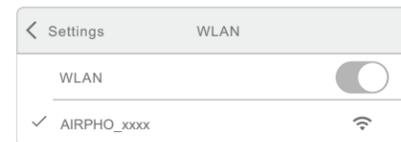


3 Configure the Range Extender

1. Launch a web browser and enter www.airphoextender.net in the address field. You will be guided to the Extender Setup Page.





2. Select your router's 2.4GHz network to extend and enter its wireless password, then click **Confirm**.

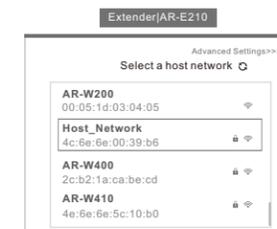

3. Set the network name (SSID) and password for your extender. You may either keep the default SSID, or customize it for the extended 2.4GHz network, then click **Confirm**.



4. Verify your wireless settings and click **Confirm**. The whole process will take about 15 seconds.

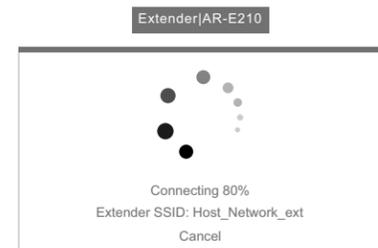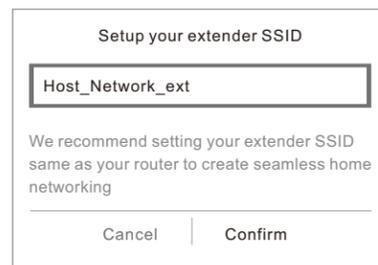

5. Check the LED status on your extender. The LED should turn solid blue, indicating a successful connection; if not, please refer to FAQ on Airpho official website: www.airpho.com

Solid blue	Solid red
The extender is connected to the router. Now you can access to the network.	The extender has a problem connecting to the router. Please try relocating the extender until the blue light is on.

LED Explanations

Status	Color	Indication
On	Blue	The Extender is connected to the router, and is in good location.
	Red	There is no active connection.
Off	--	The Extender is off.

FAQ

How to restore the range extender to its factory default settings ?

- Press and hold the reset button for 3 seconds until the red and blue LEDs shine together, then release the button. The range extender will reset after 1 minute.

What should I do if you can not open the settings interface "www.airphoextender.net" ?

- Try to move your mobile phone close to the range extender, turn on the phone's Wi-Fi and ensure it connects to the range extender's wireless network.
- Try to change your browser, and ensure you input the website in the address bar instead of search bar. You can also input "192.168.10.1" in your browser's address bar to get into the settings interface.
- If you set up on the computer, please ensure your computer has been set as getting IP address automatically.